
OQC Material Handlers/ Cranes OilQuick®



Change from grapple to generator magnet in seconds


The OQC is an OilQuick suspended quick coupler, which is primarily designed for use on loading cranes and other handling equipment.

The system consists of an extremely rugged 360° rotator mounted on our fully hydraulic, tried-and-tested quick coupler. The OQC unit is suspended from the handling equipment's stick.

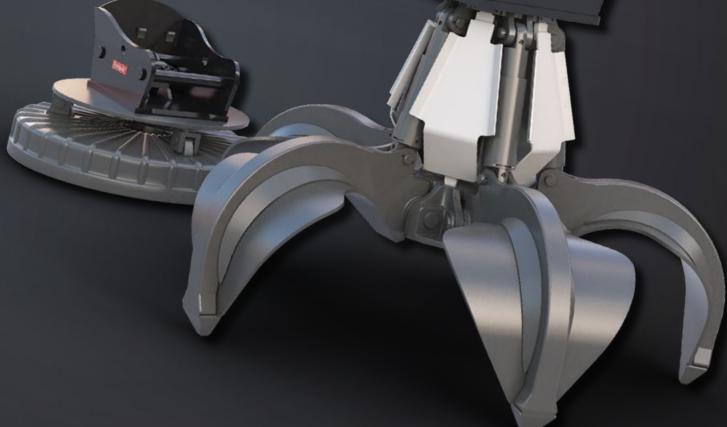


MACHINE. ANY ATTACHMENT. ANYTIME.

OILQUICKUSA.COM

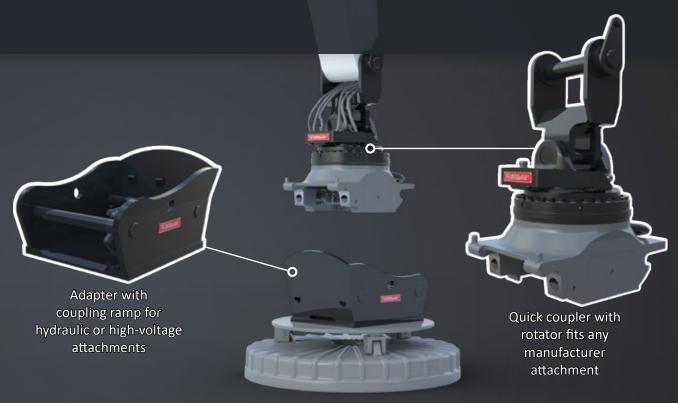

OQC Basic data

Model	Rotator	Dimensions (in.)							Weight (lbs.)			Max. lift capacity
		Α	В	С	D	Ε	F	G	Coupler	Rotator	Adapter	(t)
OQC65	XR400	17	24	21	32	27	34	20	496	551	470	20
OQC70/5	5 XR600	22	30	24	37	30	27	25	816	705	758	30

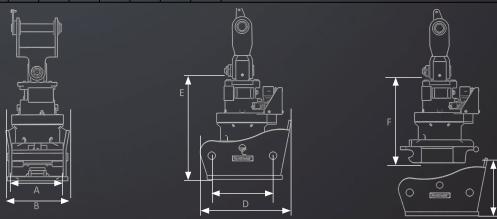

Model	Max. no	. of couplings	Elect	rical couplings	Max. operating	Rotation max.	
	1"	3/4"	High Power 250V	Control Power 24V, 10 Pole	pressure	working pressure	
OQC65	-	3	Option	Option	5076 psi	3626 psi	
OQC70/55	2	1	Option	Option	5076 psi	3626 ps	

^{*} Weight without grapple suspension

