Talbert ®
SINCE 1938

35HT

35HT

Heavy-duty planetary winch, standard with **Talbert**, is operated by a wireless remote control, delivering maximum pulling power.
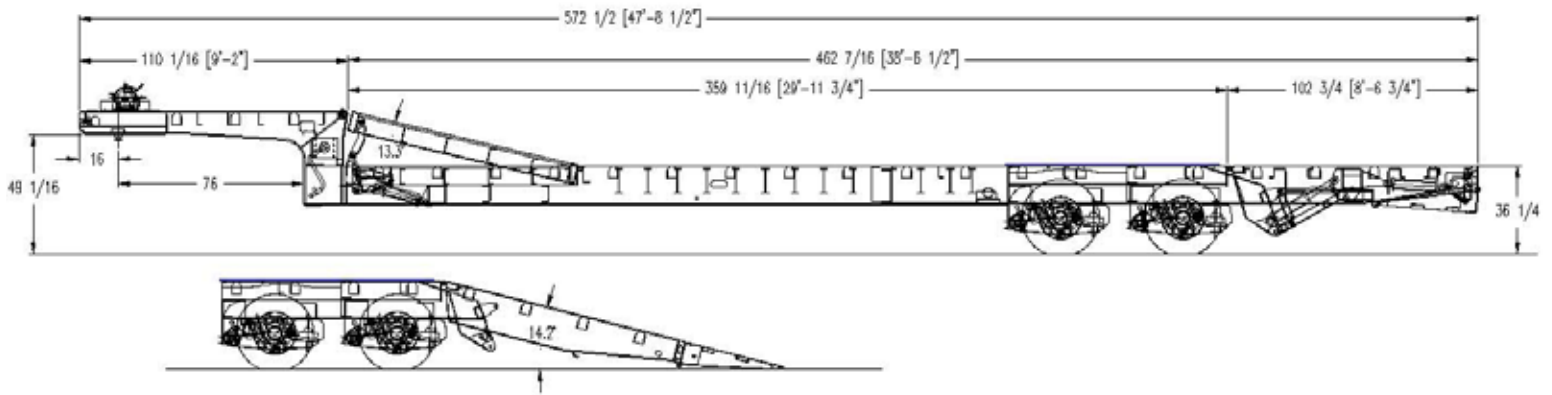
The hydraulic front ramp offers a convenient method for gooseneck loading.

Apitong flooring – proven performance and durability ensures a solid base for any load.

35HT

- 70,000 lb. Capacity Evenly Distributed (50,000 lbs. in 16 ft. 0 in. Load Concentration at 60 mph)
- 9 ft. 2 in. Gooseneck Length
- 49 in. 5th Wheel Height
- Hydraulic System is Wet Line Operation Standard
- 2-Speed Landing Legs
- Perimeter Frame Gooseneck Design
- Dual Toolboxes on Front of Gooseneck
- Hydraulic Winch Located Top, Center, Front of Gooseneck
- Wireless Remote Winch Operation
- Vertical Deck to Gooseneck Transition with Steel Plate
- 102 in. Deck Width
- 36-1/4 in. Loaded Deck Height

- 18-1/2 in. Loaded Ground Clearance
- Heavy Duty I-Beam Crossmembers on 12 in. Centers
- Stake Pockets / Chain Slots on 24 in. Centers
- D-Rings on 4 ft. Centers on Deck and Tail
- 4 D-Rings on Gooseneck
- 3/8 in. Steel Deck Plate Covered Wheel Wells
- 25,000 lb. Axles with Oil Seals
- 1-1/2 in. Apitong Decking (Raised) on Deck and Tail
- Rear Folding Tail is 12 ft. Total (8 ft. Top of Platform and 4 ft. Flip Under) (15 Degree Loading Angle)
- Tail Has Lifting Capability of 20,000 lbs. at 4 ft. Back from Hinge Pin
- Tail is Equipped with Automatic Locking Device and Self Cleaning Bushings

- *RIDEWELL* Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- 49 in. Axle Spacing
- Tires: (8) 235/75R17.5 (H)
- Hub Piloted Type Disc Wheels / Outboard Mount Hubs
- 12-1/4 in. x 7-1/2 in. Brakes with ABS Braking System
- Auto Slack Adjusters
- DOT Rubber Mounted Sealed Beam Lights with Modular Harness
- Mud Flaps
- Red and White Conspicuity Striping
- Estimated Weight: 18,380 lbs.
- *Valspar* R-Cure 800 Red or Black Paint

Various Options Available Upon Request. Specifications Subject To Change Without Notice.

Dealer: