

SPREAD AXLE LOWBOY SERIES

 **Talbert**
SINCE 1938

60CC/55SA-LD



**60CC/
55SA-LD**



Optional 24 in. flip gooseneck extension (increasing swing radius to 132 in.) allows greater load transfer capability.




Allows users to operate as a 3+1 spread-axle with the E1Nitro™. Can also function as four axle close coupled.



With an industry-leading 18 in. loaded deck height, the 60CC/55SA-LD offers state-of-the-art load versatility.


60CC/55SA-LD

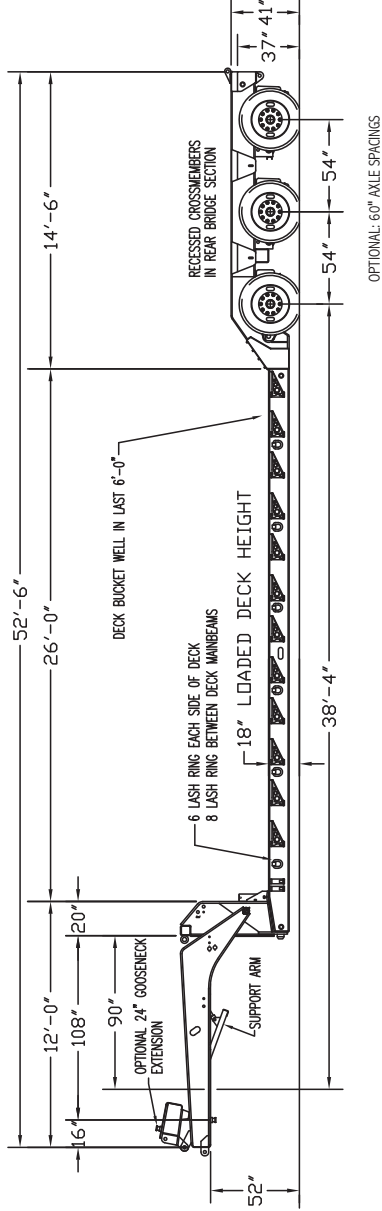

OPTIONAL: 60" AXLE SPACINGS

- Non-Ground Bearing Gooseneck Design
- 108 in. Swing Radius with Connections for 24 in. Gooseneck Extension
- Hydraulic Support Cylinder (Standard)
- Front Folding / Fixed Ramps (Optional)
- 26 ft. 0 in. Deck Length
- 12 in. Swinging / Removable Outriggers
- 8 ft. 6 in. Wide Deck
- 18 in. Loaded Deck Height / 6 in. Loaded Road Clearance
- 1/4 in. Plate Bucket Well, Last 6 ft. of Deck
- High Strength 100,000 psi Minimum Yield Steel
- 2 in. Aptong Flooring
- Two Sections Chain Storage
- Axles: 25,000 lb. Capacity
- RIDEWELL Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Manual Exhaust Valve
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc, Hub Piloted with Outboard Brake Drums
- Bolsters and Half Bolster on Rear Bridge
- 41 in. Mainbeam / 37 in. Bolster Height
- Boom Well in Rear Bridge
- Spring Parking Brake on Axle Two
- 4th Axle and 3+1 E1Nitro™ Spread Capable
- 12 Volt LED Sealed Light System
- Estimated Weight: 23,850 lbs.
- Valspar R-Cure 800 Red or Black Paint
- 110,000 lb. Capacity in 10'-0" two point rigid load base with a 108" swing radius and 4 axles close coupled
- 110,000 lb. Capacity in 1/2 Deck Length two point rigid load base with a 132" swing radius and 3+1 E1 nitro axles extension
- 120,000 lb. Capacity in 1/2 Deck Length two point rigid load base with a 108" swing radius and 4 axles close coupled

Various Options Available Upon Request. Specifications Subject To Change Without Notice.

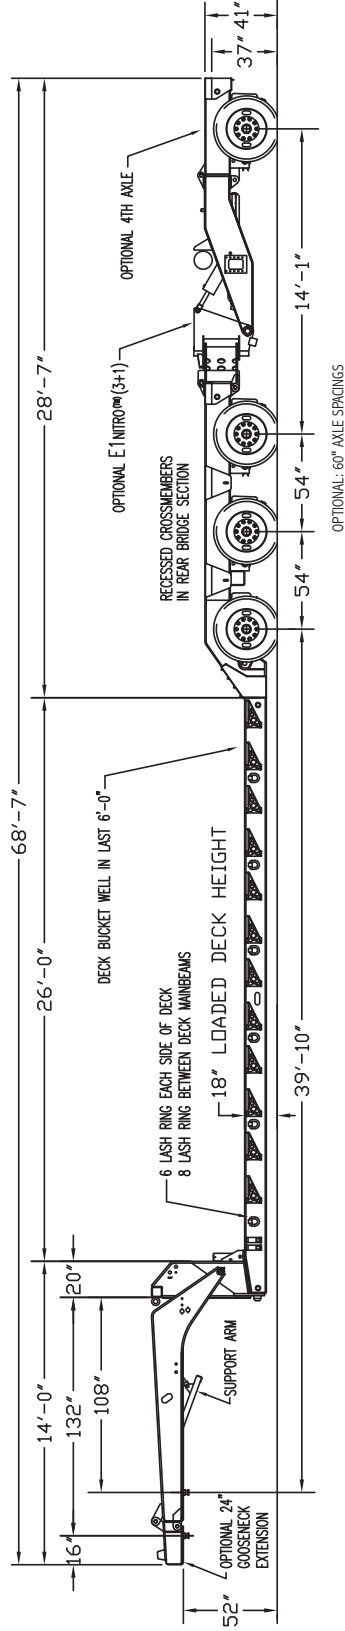

OPTIONAL: 60" AXLE SPACINGS



Dealer: