


KNAPHEIDE MECHANICS TRUCKS



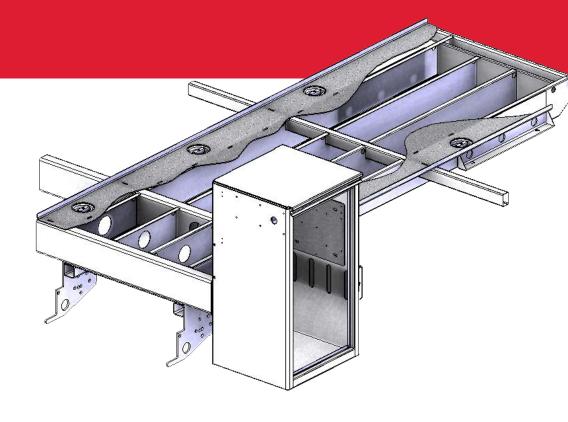

KMT1, KMT2 & KMT3/KMS30 CRANE BODY UNDERSTRUCTURE

Unique torq-isolator crane support system transfers lift forces into the full length torsion box subframe and outriggers, and not the side compartments.

Reinforced rear vertical curb side compartment is independent of all other side compartments, eliminating flexing and twisting of side packs.

KMT1, KMT2 & KMT3 MODELS

Knapheide KMT1 Mechanics Trucks are compatible with Class 5 trucks and built for crane load capacities of up to 7,500 lb. Count on our KMT2 and KMT3 trucks for the most demanding lifting applications. These are compatible with Class 6-8 trucks.

KMS16 & KMS30 MODELS

Knapheide KMS16 trucks are equipped with an electric crane, while KMS30 trucks have the option of either an electric or hydraulic crane for lifting applications. Both are compatible with Class 3–5 trucks.

POPULAR VOCATIONS



2

4

A. DOUBLE PANELED DOORS

made of galvanneal steel (14-gauge outer panel, 20-gauge inner panel) are reinforced with internal braces for durability

B. 3-POINT T-HANDLE LATCHES

ensure your compartment doors stay closed and are individually lockable

C. MASTER LOCKING SYSTEM

locks down all compartments on one side with one motion

D. KNAPLINER BUMPER

provides work surface with lockable through compartment, a vise plate, and two grip strut flex steps

E. HEAVY DUTY ALUMINUM GRAB HANDLES

installed on both sides at rear of the body for easy cargo area access

F. INTEGRATED LED S/T/T AND B/U, LED STROBES

with (8) selectable patterns and builtin reflectivity mounted to external rear light boxes made of UV-resistant ABS material

G. 16" HIGH DOUBLE PANEL SLAM TAILGATE

with center latch and flat space for displaying company graphics

H. CAB PROTECTOR

welded-on with fully punched window for visibility

I. (4) LED 1200 LUMEN WORK LIGHTS

installed (2 at front, 2 at rear) for low-light working conditions

J. HYDRAULIC OUTRIGGERS

out-and-down curb side and hydraulic down street side for crane stability during lifting operations

K. 44,000 FT-LB. CRANE

with 21' hydraulic reach, provided by a two-stage hydraulic extension (KMT1)

66,000 FT-LB. CRANE

with 21' hydraulic reach, provided by a two-stage hydraulic extension (KMT2)

70,000 FT-LB. CRANE

with 30' hydraulic reach, provided by a two-stage hydraulic extension (KMT3)

L. RECIPROCATING HYDRAULIC COMPRESSOR

up to 40 CFM (KMT1)

ROTARY SCREW HYDRAULIC COMPRESSOR

35 CFM on 11' models 60 CFM on 14' models

M. PLANETARY WINCH provides a 60 ft. per minute

single line speed

N. KNAPLINER

applied to cargo area floor, sides, compartment tops, bulkhead, bumper and tailgate for durability



FEATURES NOT SHOWN

SORTIMO PART STORAGE CONTAINERS

in horizontal compartment on street side

ALUMINUM MECHANIC 7-DRAWER SET

Extreme duty aluminum mechanic 7-drawer set on street side

HEXAGONAL BOOM

eliminates boom flex and lateral movement for ultimate stability

MULTI-FUNCTION RADIO REMOTE CONTROL

provides convenient complete control of the crane

KNAPHEIDE'S WATER-BASED UNDERCOAT

Bodies are fully protected with Knapheide's water-based undercoat

ELECTRODEPOSITION PRIME-PAINT SYSTEM

provides superior corrosion resistance

(6) D-RING CARGO TIE DOWNS

each D-ring provides a 2000 lb working load capacity

3/16" TREAD PLATE FLOOR provides traction for safety

12-GAUGE GALVANNEAL STEELCompartment bottoms and end panels



S

Ш

 α

⋖

Ш

ш

Z

Ш

Σ

 α

1

Д

Σ

0

DOUBLE-SPRING OVER-CENTER RETAINER

on vertical compartment doors eliminate involuntary swing



NEOPRENE DOOR SEALS

protect compartments from the weather



ADJUSTABLE DIVIDER SHELVES

250-lb. capacity



CONTINUOUS STAINLESS STEEL HINGES

are pry-proof and corrosion-resistant

CRANE COMPARTMENT



50' X 1/2" COMPRESSOR HOSE REEL AND ROLLER FAIRLEAD through curb side vertical compartment



POLYETHYLENE FORMED DRIP PAN WITH DRAIN HOSE

placed under the crane manages water intrusion through the crane pedestal



KNAPHEIDE CONTROLLER power cell, controller and 8-button

switch panel located in the rear crane compartment. CAN bus system with continuous working load of 115 amps features built-in overload current protection for system and operator system

A. REINFORCED REAR VERTICAL **CURB SIDE COMPARTMENT** eliminates flexing and twisting of side packs

B. DOUBLE PANELED DOORS

made of 20-gauge galvanneal steel are reinforced with internal braces for durability

C. AUTOMOTIVE-QUALITY, **ROTARY-STYLE LATCHES**

make opening and closing easy (KMS16)

T-HANDLE LATCHES (KMS30)

D. MASTER LOCKING SYSTEM

locks down all compartments on one side with one motion

E. KNAPLINER BUMPER

provides versatile work space on a flat surface

F. INTEGRATED LED S/T/T AND B/U, LED STROBES

with (8) selectable patterns and builtin reflectivity mounted to external rear light boxes made of UV-resistant ABS material

G. DOUBLE PANEL SLAM TAILGATE

with center latch and flat space for displaying company graphics

H. CAB PROTECTOR

welded-on with fully punched window for visibility

I. (2) LED 1200 LUMEN **WORK LIGHTS**

installed for low-light working conditions (KMS16)

(4) LED 1200 LUMEN WORK LIGHTS

(KMS30)

street side

load capacity

J. HEAVY DUTY ALUMINUM **GRAB HANDLES**

installed on both sides at rear of the body for easy cargo area access

K. (1) MANUAL OUTRIGGER

for crane stability during lifting operations

L. UP TO 16,000 FT-LB. CRANE

with 20' reach (KMS16)

UP TO 30.000 FT-LB CRANE

with 21' reach (KMS30)

M. PLANETARY WINCH

provides a 15 ft. per minute single line speed

N. KNAPLINER

applied to cargo area floor, sides, compartment tops, bulkhead, bumper and tailgate for durability



S

Ш

 α

⋖

Ш

ш

Z

Ш

Σ

 α

1

Д

Σ

0

 \bigcirc

DOUBLE-SPRING OVER-CENTER RETAINER

on vertical compartment doors eliminate involuntary swing



NEOPRENE DOOR SEALS

protect compartments from the weather



ADJUSTABLE DIVIDER SHELVES

250-lb. capacity



CONTINUOUS STAINLESS STEEL HINGES

are pry-proof and corrosion-resistant



POLYETHYLENE FORMED DRIP PAN WITH DRAIN HOSE

placed under the crane manages water intrusion through the crane pedestal



CRANE COMPARTMENT

THE CRANE REINFORCEMENT KIT

allows you to incorporate a crane up to 4.000 lb. capacity (16,000 ft-lb. max.) onto the rear curb side corner of your body as shown on KMS16.

FEATURES NOT SHOWN

SORTIMO PART STORAGE CONTAINERS

ALUMINUM MECHANIC 6-DRAWER SET Extreme duty aluminum mechanic 7-drawer set on

(6) D-RING CARGO TIE DOWNS each D ring provides a 2000 lb working

KNAPHEIDE'S WATER-BASED UNDERCOAT

Bodies are fully protected with Knapheide's water-based undercoat

ELECTRODEPOSITION PRIME-PAINT SYSTEM


provides superior corrosion resistance

TORSION BOX SUBFRAME

1/18" TREAD PLATE FLOOR provides traction for safety

14-GAUGE **GALVANNEAL STEEL** Compartment bottoms, floors

and end panels

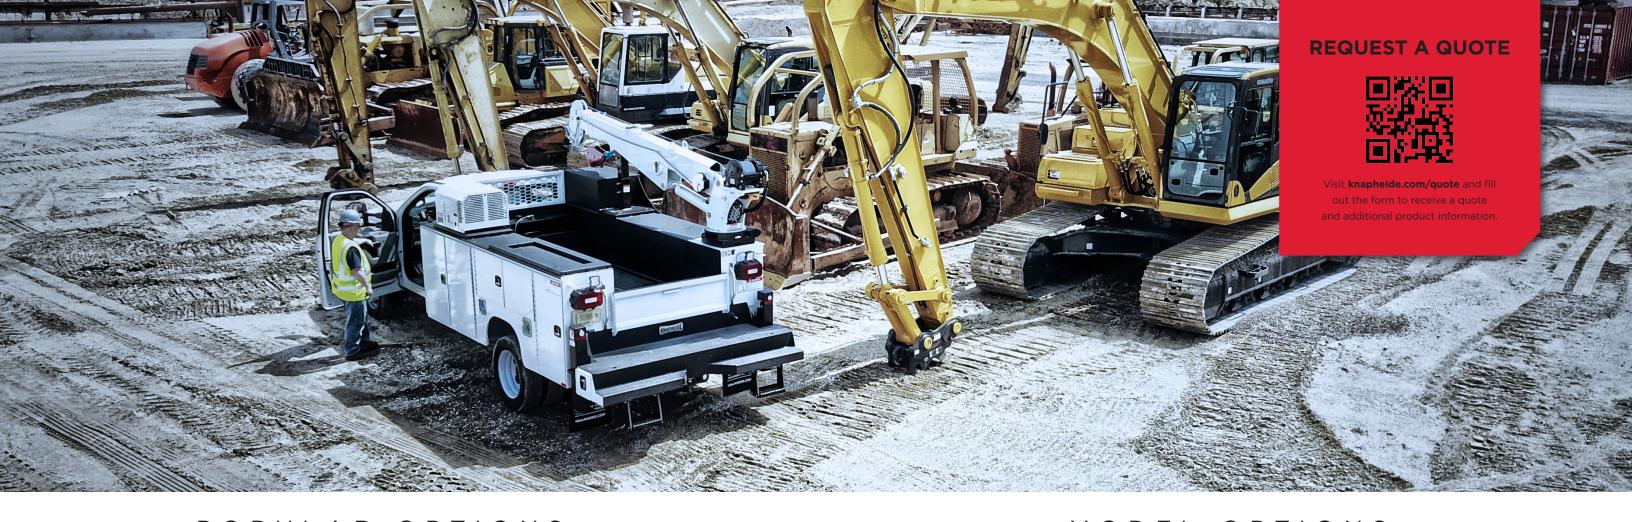

POPULAR OPTIONS

MODEL OPTIONS



AUXILIARY LIGHTING



WELDER



LED COMPARTMENT LIGHTS



CARGO COVER



4x BUTTON KEYPAD



STEEL MECHANIC DRAWERS



APU UNIT



ADDITIONAL MECHANIC DRAWERS



LUBE SKID

KMT1, KMT2 & KMT3

MODEL	GVWR MIN./RANGE	BUMPER	BODY LENGTH	COMPARTMENT HEIGHT	COMPARTMENT DEPTH	CARGO AREA WIDTH	TOPS AND BACKS	REAR HITCH
KMT1-11	19,500	24" with step down	11'	44", 60" raised front	22"	50"	1/8" smooth steel	2.5" receiver tube below bumper
KMT2-11	26,000	24" with step down	11'	60"	22"	50"	1/8" smooth steel	Pintle mount plate below bumper
KMT2-13	26,000	24" with step down	13'	60"	22"	50"	1/8" smooth steel	Pintle mount plate below bumper
KMT2-14	26,000	24" with step down	14'	60"	22"	50"	1/8" smooth steel	Pintle mount plate below bumper
KMT3-14	33,000+	24" with step down	14'	60"	22"	50"	1/8" smooth steel	Pintle mount plate below bumper

KMS16 & KMS30

MODEL	GVWR MIN./RANGE	MAXIMUM CRANE	BUMPER	BODY LENGTH	COMPARTMENT HEIGHT	COMPARTMENT DEPTH	CARGO AREA WIDTH	REAR HITCH
KMS16-9	13,300-19,500	16,000 ft-lb.	12" with outrigger tube	9'	40", 60" raised front option	20"	54"	2.5" receiver tube below bumper
KMS16-11	13,300-19,500	16,000 ft-lb.	12" with outrigger tube	11'	40", 60" raised front option	20"	54"	2.5" receiver tube below bumper
KMS30-11	1-11 15 000-19 500 30 000 ff-16		12" with outrigger tube	11'	44", 60" raised front option	22"	50"	2.5" receiver tube below bumper

^{*}KMS are installed packages only

8



SIX YEAR, **LIMITED TIME WARRANTY**



THROUGH



DOOR HINGES WILL NOT FAIL OR COME OFF BODY



LATCHES AND LOCK CYLINDERS WILL NOT FAIL TO OPERATE



SHELVES WILL NOT BEND UNDER MAX. LOAD OF 250 LBS.

TO LEARN MORE VISIT www.knapheide.com/warranty



NEVER SETTLE

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

KNAPHEIDE. NEVER SETTLE.



The Knapheide Manufacturing Company 1848 Westphalia Strasse | Quincy, IL 62305 217-222-7131 www.knapheide.com