


USES OF FIRE-RETARDANT-TREATED WOOD	IBC 2018 Ed.	NFPA 5000 2018 Ed.	NFPA 101 2018 Ed.
Architectural trim, exterior wall coverings	1405.1.1#3	37.2.1	*
Attics: Sprinklers not required in residential occupancies	903.3.1.2.3	See occupancy chapters	
Awnings & canopies	3105.2	32.4.2.1(3)	*
Balconies, porches, decks, and exterior stairways	603.1#1.4	37.2.2.2	*
Bay and oriel windows	705.2.4	37.2.2.1	*
Children playground structures in malls	424.2#1		
Combustible projections	705.2.3	37.2	*
Exterior bearing & nonbearing walls: Type III const.	602.3	7.2.4.2.1	4.4.2.1 ¹
Exterior bearing & nonbearing walls: Type IV const.	602.4.1	7.2.5.6.7(3)	4.5.6.7 ¹
Exterior nonbearing walls in Types I & II construction	603.1#1.2	7.2.3.2.12.1	4.3.2.12.1 ¹
Enclosed combustible spaces in sprinklered buildings of all types of construction: Sprinklers not required	NFPA 13: 1999: 8-13.1.1#9; 2002: 8.14.1.2.11; 2007-2016: 8.15.1.2.11; 2019: 9.2.1.12		
Fire barrier: See partitions Types I & II construction	603.1#1.1	7.2.3.2.11.2	4.3.2.11.2 ¹
Fuel dispensing station (marine and motor vehicle)	406.7.2	32.4.5.2	*
Grandstands: Allowable areas increased		32.7.5.2(5)	12.4.9.3.3
Grandstands: Allowable heights increased		32.7.5.4	12.4.9.3.6
Interior finish with flame spread index ≤ 25 (Class A)	803.1.2	10.2.3.3(1)	10.2.3.3(1)
Kiosks in covered or open mall buildings	402.6.2#1.1	27.4.4.13.1(1)	36.4.4.11(1)(a)
Liquid storage rooms (shelving, racks, and wainscoting)	415.11.5.2#3	9.3.4 ³	*
Mechanical equipment screens	1510.6.2#2		
Parapet not required: FRTW sheathing:			
Exterior walls	705.11#5.1	37.1.3.1(6)(b)	*
Fire and party walls in Types III, IV, and V	706.6#4.3	8.3.3.7.4.2	6.6.4.2 ²
Townhouses: Exterior and common wall use within 4ft of such walls	Intl. Residential Code: R302.2.4	22.5.4	*
Partitions (2 hr or less) in Types I & II construction	603.1#1.1	7.2.3.2.11.2	4.3.2.11.2 ¹
Partitions (fixed) establishing corridors in buildings with one tenant serving less than 30 people	603.1#11	7.2.3.2.11.2	*
Pedestrian walkways	3104.3#2		*
Platforms in Types I, II, and IV construction	410.3	7.2.3.2.7	4.3.2.7 ¹
Plenums in all types of construction	Intl. Mechanical Code: 602.2.1	4.3.11.2.6(2) ⁴	
Ramps		11.2.5.4.1(2)	7.2.5.4.1(2)
Roof construction in Types I & II construction	603.1#1.3	7.2.3.2.9.2	4.3.2.9.2 ¹
Roof construction in Types I, IIA, IIIA, & VA construction when ≥ 20 ft. above the floor	Table 601, Footnote b	7.2.3.2.8 (Types I & II)	4.3.2.9.1 ¹ (Types I & II)
Rooftop structures (penthouses)	1510.2.4		*
Shakes and shingles: Wood	1505.6	38.3.2	*
Scenery and stage properties (new construction)			12.4.6.11.3
Scenery and stage properties (existing construction)			13.4.6.11.3
Wood veneer	1404.5#1		*
Walls and ceiling furred & dropped more than 1-3/4"	803.15.2.1		*

*See the building code ¹NFPA 220 ²NFPA 221 ³NFPA 30 ⁴NFPA 90A

Look for this information on all FRTW labels

Exterior

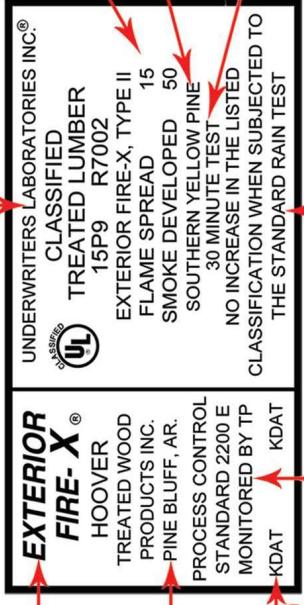

Product Name

Treating Plant

Drying Method

Approved Agency
Name & Logo

Flame Spread
25 or Less

Product Species


ASTM E-84
Reference

ASTM D2898*

Treating Standard

* Only required for exterior FRTW

Interior

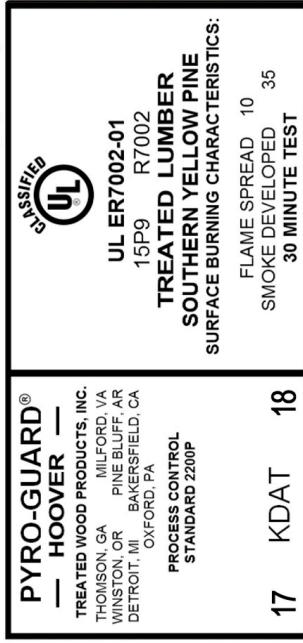

Code compliant stamps must contain this information.
Product coloration is not a substitute for a building code
approved, third-party inspection agency label.

For additional copies of this informational card please contact our Technical Department

Phone: 800-TEC-WOOD (832-9663)

Website: www.FRTW.com

Email: tecwood@frtw.com

Seminars: www.learnaboutfrtw.com