

SPREAD AXLE EXTENDABLE

 **Talbert**®
SINCE 1938

55SA TELE



55SA TELE



Increased camber as deck opens due to extensive deck length, offering greater hauling capabilities.




3rd axle and 4th axle attachments can be used as 3 or 4-axle close couple, 3+1 or 2+2 spread axle.



24 in. gooseneck extension standard; other optional lengths available.

55SA TELE

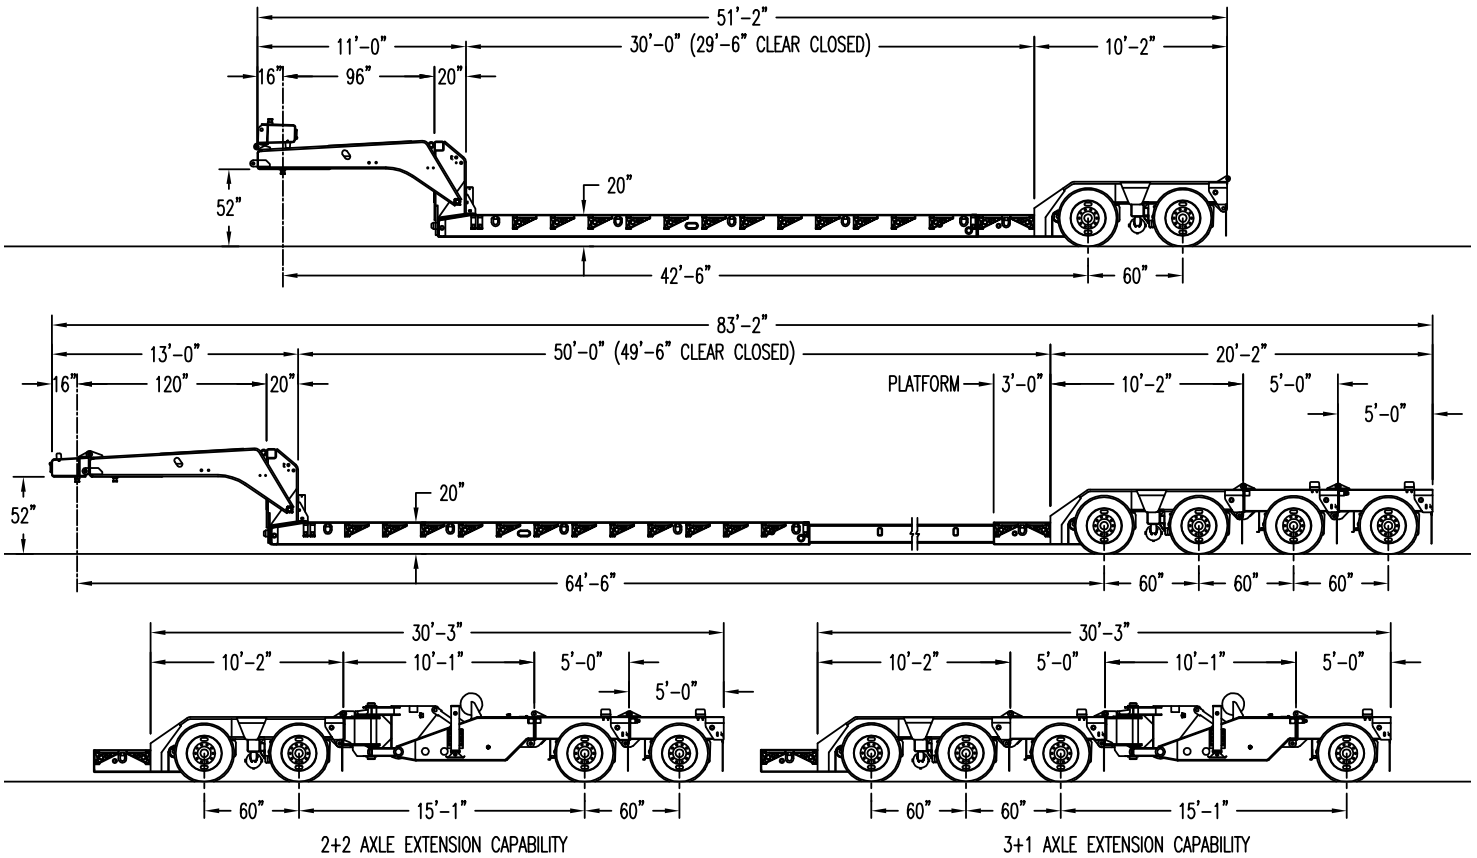

- Hydraulic Removable Gooseneck
- 96 in. Swing Radius (120 in. with Gooseneck Extension)
- Front Folding Ramps (Optional)
- 30 ft. 0 in. Deck Length Closed
- 50 ft. 0 in. Deck Length Extended
- Deck Extends Increments of 2 ft., 4 ft., 6 ft., 8 ft., 12 ft., 16 ft., 20 ft.
- 12 in. Swing/Removable Outriggers
- 8 ft. 6 in. Wide Deck and Rear Bridge
- 20 in. Loaded Deck Height
- 6 in. Loaded Road Clearance
- High Strength T1 Steel Construction
- Axles: 25,000 lb. Capacity
- **RIDEWELL** Suspension: Air Ride with Automatic and Talbert +3 in. / -3 in. Manual Control
- Tires: 275/70R22.5 (H)
- Wheels: Steel Disc Hub Piloted
- Connections Rear of Axle 3
- 3rd Axle can be Used in 3+1 Spread
- Optional 4th Axle Available
- Front Bridge Ramp
- Cambered Telescopic Beams
- Spring Parking Brake on One Axle
- **Valspar R-Cure 800 Red or Black Paint**
- Capacity: 110,000 lb.in 2 Point Rigid Load Base 6 ft.-0 in. Shorter than Deck Length, When in Extended Condition

Various Options Available Upon Request. Specifications Subject To Change Without Notice.



Industry Leading 20 in. Loaded Deck Height



Optional Rolling Bunk - Side View



Optional "RA" - Removable Rear Bridge

Dealer:



Talbert Manufacturing Inc. \ 1628 W. State Road 114 \ Rensselaer IN 47978 \ 800-348-5232 \ Fax: 219-866-7060

sales@talbertmfg.com \ www.talbertmfg.com

0215 PUB 237A