

# OO EXCAVATORS



## Change hydraulic attachments in 10 seconds

OilQuick is an automatic quick coupler system that allows hydraulic work tools to be connected and disconnected from the driver's cab.

The operator can change between various work tools within seconds.

You will always have the right attachment at the right time for any job.



**ANY MACHINE. ANY ATTACHMENT.  
ANYTIME.**

[OILQUICKUSA.COM](http://OILQUICKUSA.COM)

# Coupler function


OQ system for excavators

**Rugged** quick coupler made of high-grade steel. The mounting frame can be adjusted to fit most excavators in the weight class.

**Bores** for locking bolts. Optimum fit with minimum wedge effect.

**H-cylinder** with double hose break valves. Continuous readjustment of the locking bolts at full system pressure locks the attachments safely in place.

**OilQuick function** the hose couplings are connected automatically and the attachment securely locks in place with only one cylinder movement enabling you to change hydraulic tools in a matter of seconds.

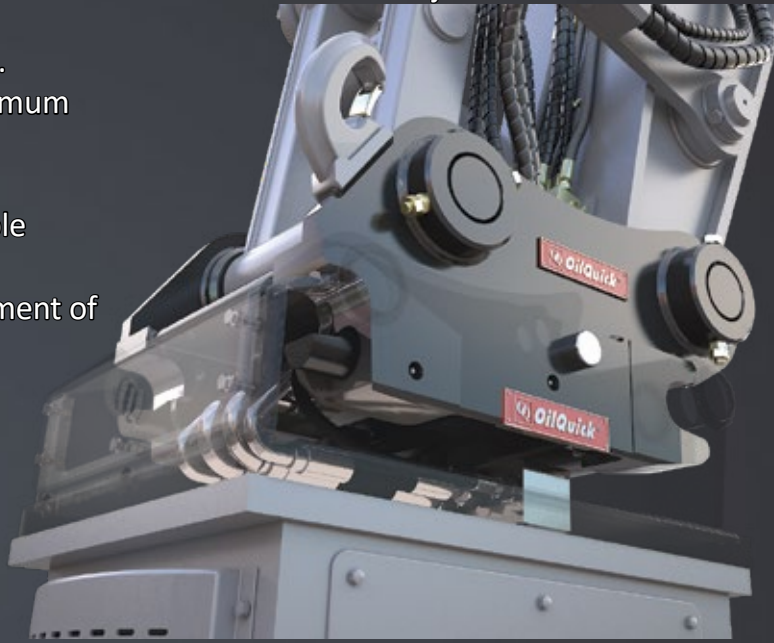

The **OilQuick frame** has hardened pins, bevelled inner edges, drilled holes for welded pins, and enables a precision fit that connects with no play for minimum wear and long service life.

## Excavator Basic data

Model	Width (in.)	Pin distance (in.)	Weight (lbs.)	Weight of Machine (T)	Max. number of hose couplers						Electrical Coupling (Optional)
					Max	3/8"	1/2"	3/4"	1"	1.5"	
OQ 40/24	9.44	11.8	66	1 - 5	4	2	2				Yes
OQ 45-5	11.4	16.9	187	5.5 - 13	5	3	2				Yes
OQ 65	17.3	20.9	375	15 - 24	5		2	3			Yes
OQ 65/Rail	17.32	20.4	375	15 - 24	8		5	3			Yes
OQ 70/55	21.7	23.6	507	20 - 31	6		2	2	2		Yes
OQ 80	23.2	26.4	705	28 - 44	6		2	2	2		Yes
OQ 90	29.5	29.5	1390	44 - 77	9	1	3	1	4		Yes
OQ 120	34.3	36.4	2646	77 - 132	8		3		3	2	Yes