


Beacon120 LED Temporary Highbay

The Beacon120 pays for itself in labor & material savings alone. Installation is much quicker since **no rewiring** is required to accommodate different voltages.


The **pre-installed 50' daisy-chain** cord drastically reduces time, labor & materials required. Simply plug & play, right out of the box. No man-hours are wasted on bulb changes, repairs or maintenance for site lighting during the project.

At the end of the job, easily take down and send to the next job. No hazardous waste, fragile bulbs or disposable materials to deal with.

Recommended spacing is approximately 50' apart to reach 5-foot candles of light coverage in most applications. **Talk to us about designing an optimal temporary lighting layout for your project.**

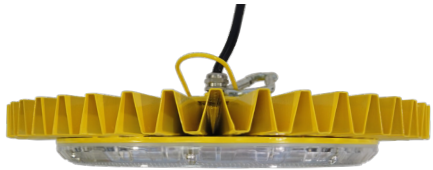

3' cord and plug

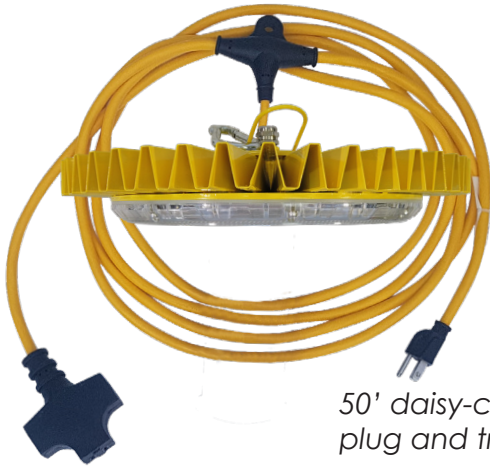

50' daisy-chain with plug and triple outlet

KEY FEATURES

- DirectDrive technology
- Durable and compact - **exceeds military grade drop test standards.**
- Easy to install, uninstall and transport
- Weatherproof - certified for outdoor use
- Pre-installed 50' daisy-chain



KEY BENEFITS

- Reduced costs for labor and materials
- Reuse on multiple projects
- 70% energy savings
- Safer work environment

SPECIFICATIONS		
VOLTAGE	90 - 277V AC (wired with NEMA 5-15 plug)	
WATTAGE	120W (1 amp at 120V)	
LIGHT TEMPERATURE	4500K (bright white light • no blue tint)	
LUMENS	15,250	
LIGHT EXPECTANCY	Rated for over 50,000 hours	
CONSTRUCTION	Cast aluminium housing, polycarbonate lens	
DIMENSIONS	Height 2" x Diameter 12" x Weight 2.6lbs	
WEATHERPROOF RATING	IP65	
CORD TYPE	LE-HB120LED	3' with 5-15 plug 18/3 STJOW
CORD TYPE	LE-HB120LED-25P25C	25' with triple outlet & 25' with 5-15 plug. 14/3 SJTW

