


Lind Apollo UV-C LED Light

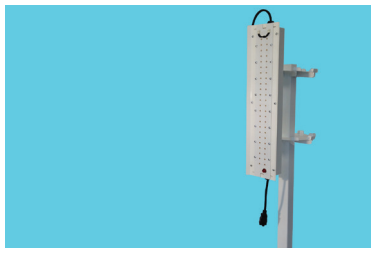

Lind Equipment has developed a new portable UV-C LED light designed to help with decontamination of equipment and areas.

UV-C light is a scientifically proven method of killing viruses and bacteria. Recent studies show that a UV-C dose level of 25m/J cm² kills COVID-19.


UV-C light has been used for many years in the treatment of drinking water and decontaminating entire rooms in hospitals. It can be used to decontaminate many areas such as: vehicles, rooms, and equipment.

EPA Est. 96309-CAN-1

Key Benefits:

- Multiple mounting options (hang from ceiling, mount on stand or permanently mount to a wall)
- Can be used on a standard power outlet
- Light turns on and off instantly (no wait time)
- Easy to set up & extremely versatile
- Rugged, durable and dependable
- Built with steel construction and UV resistant coating
- No heat produced by the LED lights

Applications:



Decontaminate Areas and Vehicles

LindEquipment.net/uvc-for-areas



Decontaminate Personal Protective Equipment


LindEquipment.net/uvc-for-ppe

Precautions for UV-C Light:

- **Never** have humans present in the room while the light is operating

BE AWARE: APOLLO LIGHT DOES NOT GIVE OFF VISIBLE LIGHT

RED warning LEDs inform users when light is energized

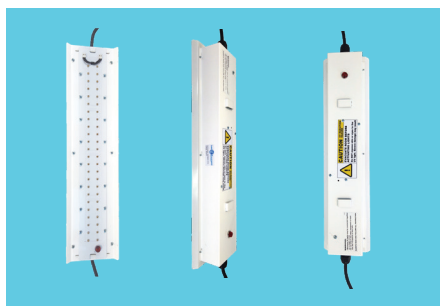

SPECIFICATIONS	
Wattage	50W (0.42 Amps at 120V)
Beam Angle	60°
UV-C Output	110 uW/cm ² at 1 metre using 275nm wavelength
Environmental	Indoor only, do not expose to water
Voltage	90-277V (default wired with 5-15P)
Weight	5.25lbs
Dimensions	Length 22" • Width 5.25" • Depth 2.5"
Construction	Steel construction with UV resistant coating
LE6725UVC-1P1C	Lind Apollo Light with 1' plug and cord on one end and daisy-chain 1' cord and outlet on the other



Lind Apollo UV-C LED Light

DC Power Options:

The Lind Apollo Light also comes with a DC power option. The unit, LE6725UVC-15DC comes with a 15' cord and a car adapter that runs off 12-24V.



Mounting:

The Lind Apollo Light can be mounted in various ways using the integral mounting slots on the back of the light. Each Apollo light comes standard with hanging straps and a wall mount. The mounting options include:

- Easily hang from the ceiling using straps
- Mount permanently to a wall.
- Use the Apollo stand to mount up to eight daisy chained Apollo lights at once (see images below)



Side view of light on stand



Top view of light on stand

- Lights mount vertically at 51" high
- Casters allow for easy movement to areas needing decontamination

Part Number of Stand:
LE6725UVC-ST

Operation:

****UV-C light is dangerous - never use while people are present****

Safety must be the overriding priority. Only energize the light when you can be sure no one will be exposed. Every Apollo light comes with warning signs to keep others out of the area. Users should take additional precautions, such as:



1. **Run an extension cord to the lights and plug it in outside the area,**
2. **Use widely available remote control outlets to energize the light once safely away, or**
3. **Use Lind Equipment's Delay Timer (LE6725UVC-TIMER):**



- Timer is easily programmable to start when you will be out of the room and stop when the treatment time is done
- Single grounded outlet
- Battery function retains time of day when unplugged for 24 hours

